


HARDWARE DESCRIPTION		QTY.
HWKT-04239X		
FLHB-04240X	M10-1.5 X 25MM CLASS 8.8 HEX HEAD FLANGE BOLT	12



PARTS INCLUDED		QTY
Driver side slider		1
Passenger side slider		1

TRAIL SLIDER

Step 1: Locate Driver side slider

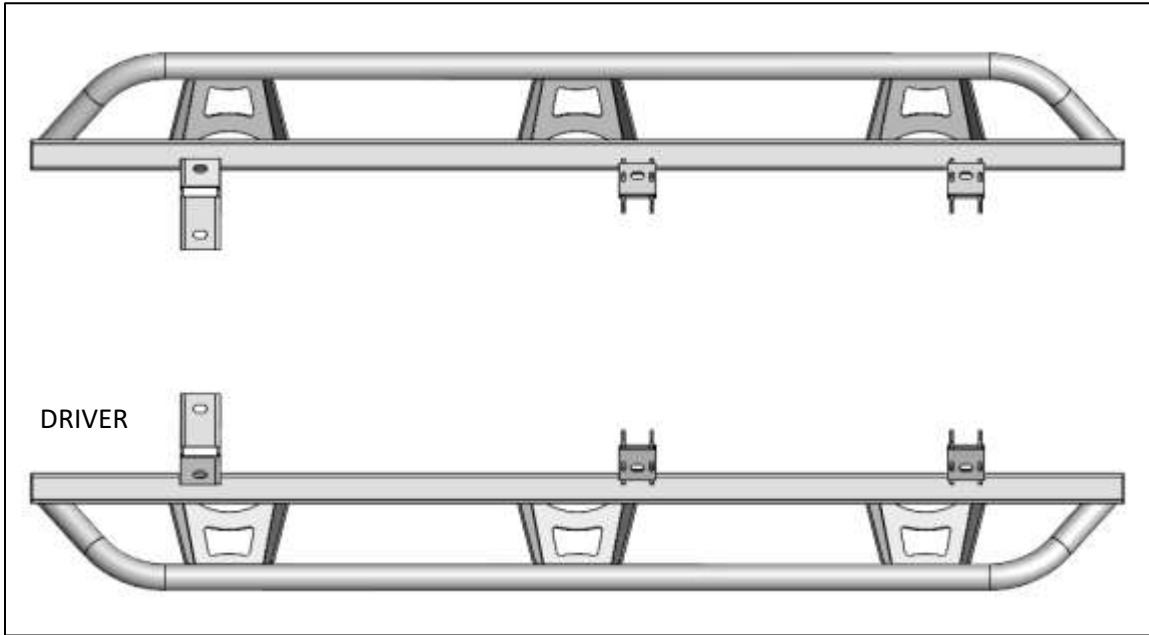

These warranties do not cover any damage, defect, or malfunction caused by misuse, abuse, accident, improper installation, modification, improper or inadequate maintenance, or on-road and off-road hazards. Incidental and consequential damages are not recoverable under this warranty. Some states or providence do not allow the exclusion or limitation of incidental or consequential damages, so this exclusion or limitation may not apply to you.

Step 2: Remove any factory running boards if equipped.



STEP 3: Carefully place step into place and loosely fasten using the supplied M10X25mm hardware.

Step 4: Next, tighten the three lower bolts first, following with the three upper bolts.
(30-35 ft/lbs)

Step 5: Repeat steps 2-4 with passenger side.

Torque sequence

